
This Detail Drawing may not be altered or changed in any manner except by the City Engineer. It is the responsibility of the user to acquire the most current version.

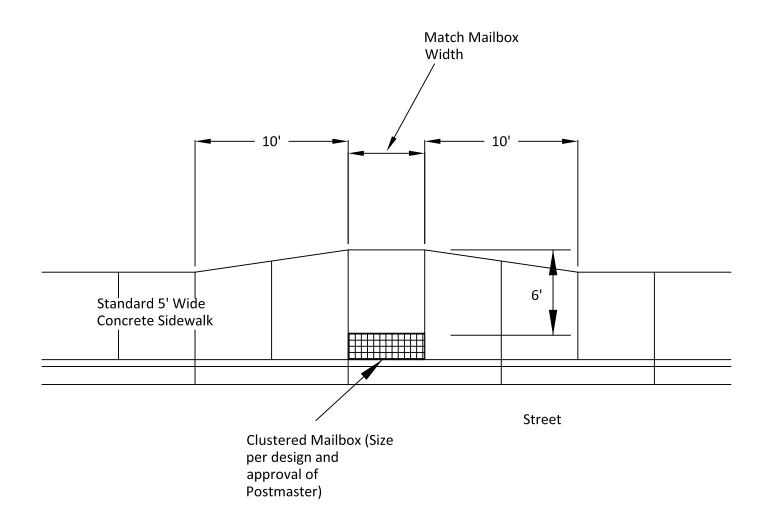

## Notes:

- 1. Clustered Mailboxes units, aka Centralized Box Units, are free standing mailbox units with multiple locked mailboxes.
- 2. Construct widened sidewalk with a minimum of 6 feet of clear space provided at the front of each clustered mailbox unit.
- 3. At least one clear pedestrian access route with curb ramp shall be provided within 50 feet of the clustered mailbox unit from the vehicular way.
- 4. Widened sidewalk outside of the public right-of-way shall have a sidewalk easement provided to the City of Wilsonville.
- 5. Back of clustered mailbox shall be set back 6 inches form face of curb.
- 6. Location of clustered mailboxes shall be coordinated with the City of Wilsonville Postmaster.

Widened Sidewalk at Clustered Mailbox Locations			CITY OF	-
DRAWING NUMBER: RD-1155	DRAWN BY: SR	SCALE: N.T.S.	WILSONVILLE	
FILE NAME: RD-1155.DWG	APPROVED BY: NK	DATE: 4/2/14	PUBLIC WORKS STANDARDS	