


This Detail Drawing may not be altered or changed in any manner except by the City Engineer. It is the responsibility of the user to acquire the most current version.

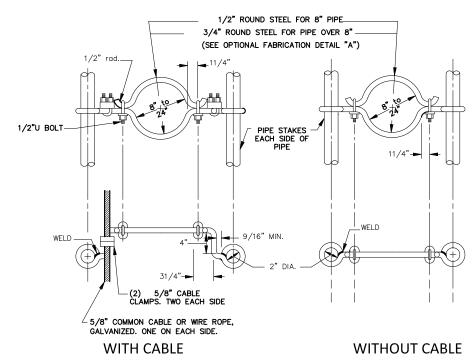

**ANCHOR ASSEMBLY** (CABLES AND CABLE CLAMPS TO BE USED WHEN SPECIFIED)





**DETAIL "A"** (OPTIONAL FABRICATION FOR IDENTICAL UPPER AND LOWER PIPE CLAMP PARTS.)

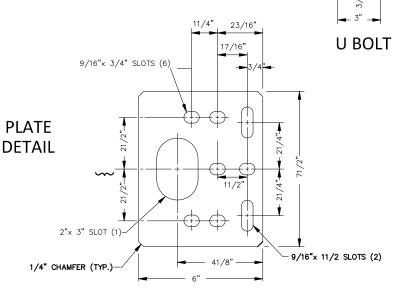

## NOTES:

- ALL PIPE STAKES AND HARDWARE TO BE HOT-DIP GALVANIZED AFTER FABRICATION.
- PIPE STAKES TO EXTEND 6" ABOVE PLATE.
- PLACE SLOPE ANCHOR ASSEMBLIES ON 20' MAX. CENTER ON SLOPES 20% OR GREATER.
- PLATE MATERIAL TO BE ASTM A36 1/4". HOT DIP GALVANIZE AFTER FABRICATION.






1/2" U BOLT

9/16" HOLES

**DRIVE PLUG CAST IRON** 



**DRIVE POINT CAST IRON** 

Pipe Slope Anchor - Steel		
DRAWING NUMBER: S-2196	DRAWN BY: SR	SCALE: N.T.S.
FILE NAME: S-2196.DWG	APPROVED BY: NK	DATE: 6/4/14

CITY OF WILSONVILLE

